

Type	C7-H23/ ... V Special relays 1 x CO power contact 1 x CO twin contact
Maximum contact load	10 A 250 V AC1 6 A 250 V AC1 10 A 30 V DC1 6 A 30 V DC1
Recommended minimum contact load	10 mA/10 V (Power contacts) 5 mA/5V (twin contacts)

Contacts	
Power contact	
Standard material	AgNi
Rated current	10 A
Switch-on current max. (20 ms)	30 A
Switching voltage max.	2,5 kV
AC load (Fig 1)	2,5 kVA
DC load	see fig. 2

Twin contact	
Standard material	AgNi + 0,2 µ Au
Rated current	6 A
Switch-on current max. (20 ms)	15 A
Switching voltage max.	250 V

Coil	
Coil resistance	see table; tolerance ± 10 %
Pick-up voltage	≤ 0,8 x U _N
Release voltage	≥ 0,1 x U _N
Nominal power	1,2 VA (AC) / 1 W (DC)

Coil table	VAC Ω ± 10% mA	VDC Ω ± 10% mA
	24 174 50	12 148 81
	48 686 25	24 594 40
	115 4K3 10.4	48 2K3 21
	230 18K6 5.2	110 11K4 10

Insulation	Volt rms, 1 min
Contact open	1000 V
Contact/contact	2,5 kV
Contact/coil	2,5 kV
Insulation, IEC 61810-1:	2,5 kV/3

Specifications	
Ambient temperature operation/storage	40 (no ice)...60 °C / -40 ... 80 °C
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
Protection class	IP40
Weight	43 g

Standard types	C7-H23/AC ... V C7-H23X/AC ... V
VAC 50 Hz/60 Hz: 24, 48, 115 (120), 230 (240) LED	C7-H23/DC ... V C7-H23X/DC ... V C7-H23DX/DC ... V C7-H23FX/DC ... V
VDC 12,24, 48, 110 LED	C7-H23BX/UC ... V
Free wheeling diode	
Polarity and free wheeling diode	
UC 24 V, 48 V, 60 V	

"..." Enter the voltage for full type designation

Accessories	
Socket:	S7-M, S7-I/O, S7-L, S7-P, S7-P0



Connection diagram




Fig. 1 AC voltage endurance



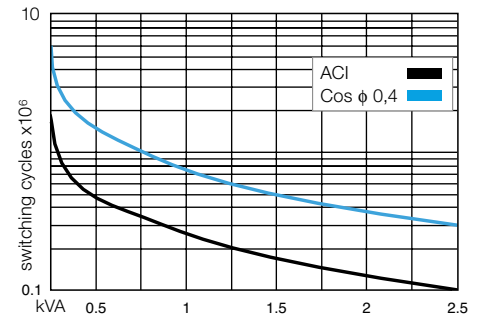


Fig. 2 AC voltage endurance

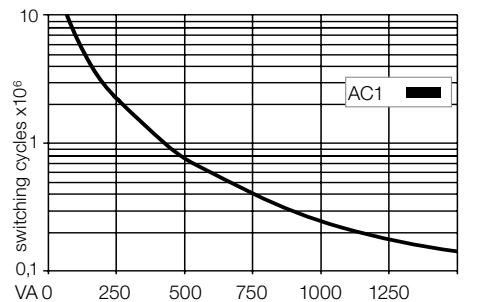

Dimensions [mm]

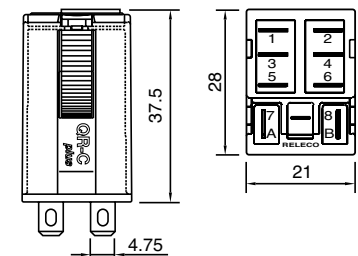

Technical approvals, conformities



IEC 61810; EN 60947