



Type	C12-G2x/ ... V Standard relay 2 open contacts			
Maximum contact load	5 A/250 V AC1	0,8 A/110 V DC1		
	5 A/30 V DC1	0,4 A/220 V DC1		
Recommended minimum contact load	10 mA/10 V Code 1 5 mA/5 V Code 2			

Contacts				
Material	Standard	Code 1	AgNi + 0,2 μ Au	
	Optional	Code 2	AgNi + 10 μ Au	
Rated current	5 A			
Switch-on current max. (20 ms)	15 A			
Switching voltage max.	250 V			
AC load (Fig 1)	1,2 kVA			
DC load	see Fig. 2			

Coil				
Coil resistance	see table; tolerance ± 10 %			
Pick-up voltage	≥ 0,8 x U _N			
Release voltage	≥ 0,1 x U _N			
Nominal power	1,1 VA (AC)/0,7 W (DC)			

Coil table					
VAC	Ω	mA	VDC	Ω	mA
24	290	45	12	224	53
48	1200	23	24	742	32
115	7.300	9,5	48	3.500	13,7
230	28.800	4,7	110	19.900	5,5

Insulation		Volt rms, 1 min
Contact open	2000 V	
Contact/contact	3000 V	
Contact/coil	5 kV	
Insulation resistance at 500 V	≥ 1 GΩ	
Insulation, IEC 61810-1	4 kV/3	

Specifications	
Ambient temperature operation/storage	-40 (no ice)...60 °C / -40 ... 80 °C
Pick-up time/bounce time	10 ms/≤ 1 ms
Release time/bounce time	5 ms/≤ 3 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥ 100000 switching cycles
Switching frequency at rated load	≤ 1200/h
Protection class	IP40
Weight	21 g

Standard types		
VAC 50 Hz/60 Hz: 24, 48, 115, (120), 230, (240)	C12-G21/AC ... V	C12-G22/AC ... V
LED	C12-G21X/AC ... V	C12-G22X/AC ... V
RC suppressor	C12-G21R/AC ... V	C12-G22R/AC ... V
VDC 12, 24, 48, 110	C12-G21/DC ... V	C12-G22/DC ... V
LED	C12G21X/DC ... V	C12-G22X/DC ... V
Polarity and free wheeling diode	C12-G21FX/DC ... V	C12-G22FX/DC ... V
AC/DC bridge rectifier 24 V, 48 V	C12-G21BX/UC ... V	C12-G22BX/UC ... V

"..." Enter the voltage for full type designation

Accessories	
Socket:	S12, S12-P

Connection diagram

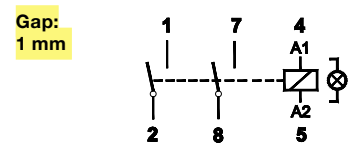


Fig. 1 AC voltage endurance



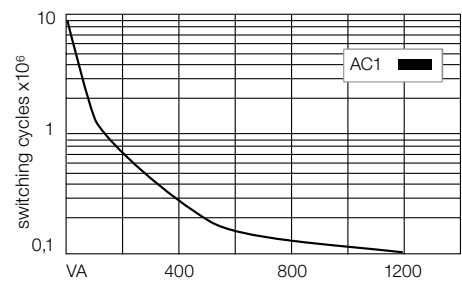


Fig. 2 DC load limit curve

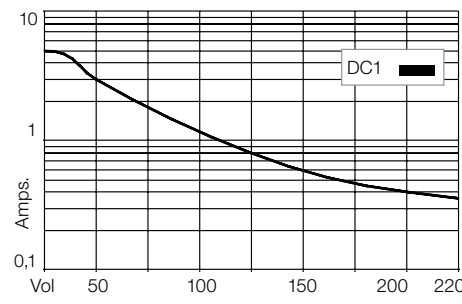

Dimensions [mm]

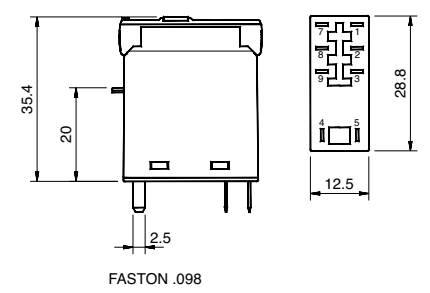

Technical approvals, conformities



IEC 61810; EN 60947